# Starfloor Click Ultimate

LUXURY VINYL TILES

The robust flooring: all rooms, all conditions, all comfort.





**O** Tarkett

## CONTENTS

FOR MODERN FAMILY LIFE THE ULTIMATE HOME FLOOR RENOVATION	3
THE NEW VINYL TILE GENERATION: A CONCENTRATE OF TECHNOLOGY	4
ULTIMATE ROBUSTNESS	5
ULTIMATE INSTALLATION	7
ULTIMATE ACOUSTIC COMFORT	9
ULTIMATE DESIGN	11
CARING FOR PEOPLE AND THE PLANET	13
ENHANCE YOUR SPACES WITI STARFLOOR CLICK ULTIMATE COLLECTION	
ACCESSORIES FOR AN ULTIMATE FINISH	17
TECHNICAL SPECIFICATIONS	



NEW! Rigid Composite Core . Technology

## FOR MODERN FAMILY LIFE THE ULTIMATE HOME FLOOR RENOVATION

When it comes time to renovate, you're looking for the best results in the quickest time possible. For an ultimate experience delivering ultimate results, Tarkett introduces its new rigid composite vinyl tile, Starfloor Click Ultimate.

This new, innovative class of hard surface flooring combines the strength and feel of wood and stone with all the advantages of luxury vinyl tiles. With all acoustic protection included, a long-lasting immaculate appearance and realistic designs. Starfloor Click Ultimate answers all your needs in one immediate, robust and durable solution. Choose your colour, click it into place and add life!


In Starfloor Click Ultimate, the extra density RCC technology delivers full performance:



#### Ultimate resistance

Install in all rooms, withstand daily life.

RCC Technology: wear-proof, stain-proof, environment-proof





**Ultimate** 

absorption

thanks to Sounblock technology





#### **Ultimate** installation

- · Install directly over ceramic tiles and most existing subfloors\*
- Quick and easy installation thanks to 14F new click system
- · Use immediately



sqm installed

by 1 person


Ultimate design

5 modern & stylish wood & stone designs



**Embossing** in register on our wood Oak decors

## THE NEW VINYL TILE GENERATION: A CONCENTRATE OF TECHNOLOGY

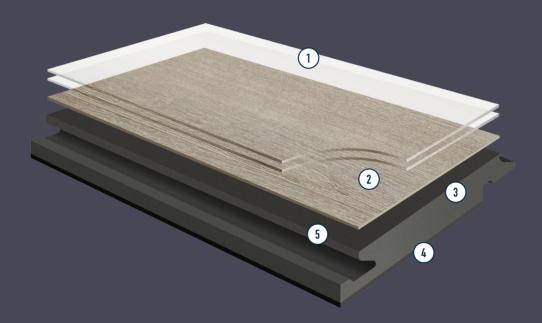



The **Ultimate PUR** surface treatment is a photo-reticulated coating that is exceptionally resistant to abrasion and scratches.



A **high definition** decorative layer includes life-like embossing-in-register on most references.



Rigid Composite Core (RCC) technology provides extreme dimensional resistance and stability, ensuring reliably durable performance.



The acoustic backing with **Soundblock technology** absorbs 19dB.



Installation is fast and easy thanks to new **I4F Click technology**. Simply drop, lock and click into place.

NEW! Riaid **Composite Core** Technology

## **ULTIMATE** ROBUSTNESS

The new patented extra dense rigide composite core make Starfloor Click Ultimate ideal for use in all rooms in a busy home. The flooring shrugs off spills in the kitchen and bathroom, temperature variations in the veranda, and the insistent battering of a busy family life.

#### **ULTIMATE RESISTANCE**



Wear-Proof: Top resistance to indentation, abrasion, scratches and scuffs

Meeting Class 33 high traffic standards, Starfloor Click Ultimate offers extraordinary resistance to intense family lives thanks to the new extra dense RCC technology.



**Stain-Proof:** Resists stains, easy to clean

Ultimate PUR surface treatment protects the floor from stains and facilitates cleaning.



#### **ULTIMATE THERMOSTABILITY**




**Environment-Proof:** Withstands temperature extremes and water

Neither water, the cold nor heat can alter Starfloor Click Ultimate's appearance. It maintains excellent dimensional stability in extreme temperature variations. From the entrance to the bathroom, Starfloor Click Ultimate can be installed everywhere.


no deformation over time

100% waterproof\*

Maximum temperature of the floor allowed after installation (°C)



<sup>\*</sup> See with your local installer for installation recommandation.

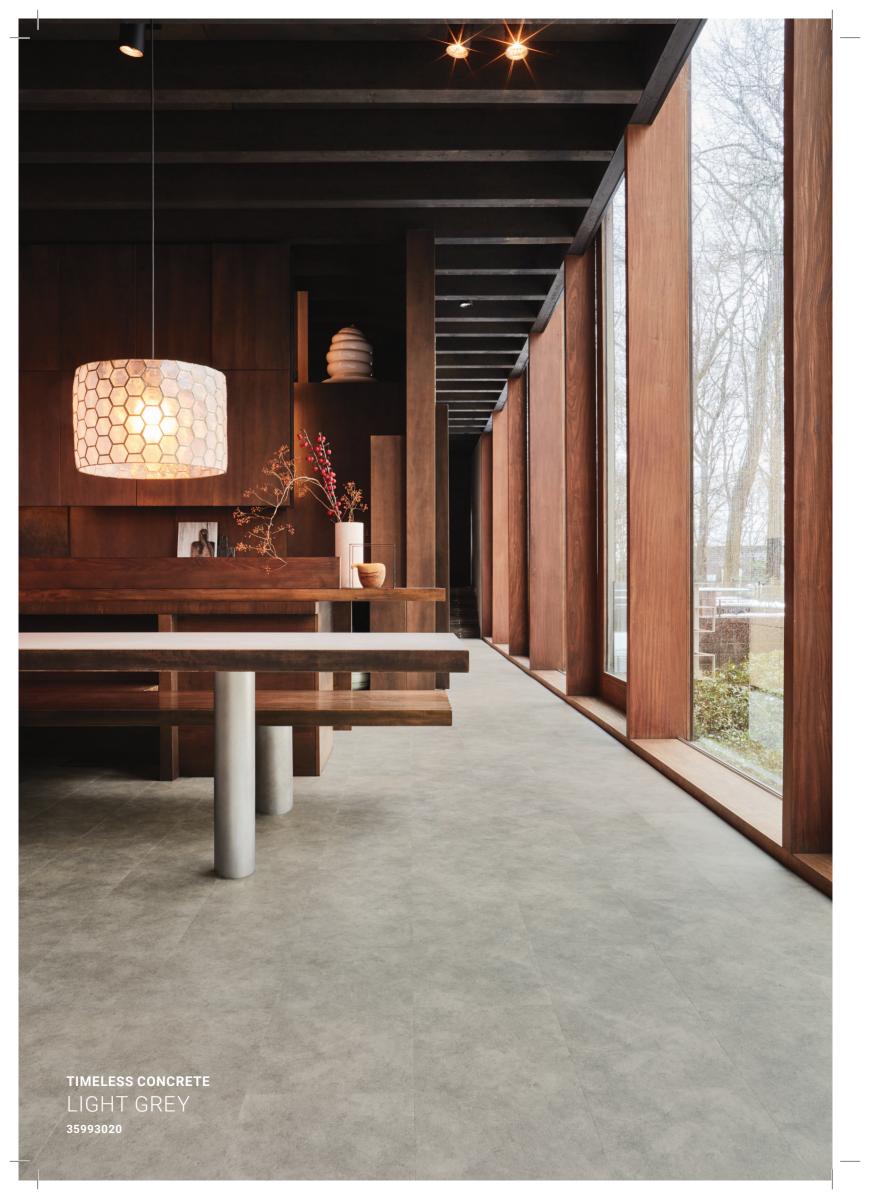

## **ULTIMATE** INSTALLATION

Requiring little to no subfloor preparation\*, no gluing and no waiting, Starfloor Click Ultimate makes for a guick and efficient renovation. You can even place it into position directly over ceramic tiles\*. Interfering as little as possible with a family's activities, anticipation grows as you create elegant spaces for them. Install and go!



#### Place directly over ceramic tiles and most existing subfloors

Little or no special subfloor treatment\* is required before installation and subfloor imperfections are greatly minimised thanks to the flooring's conception.

#### Rigid composite core stiffness


Install on ceramics with joints up to 8mm width and 3mm depth\*



#### Foam backing

Our Starfloor Click Ultimate Tiles have a foam backing that covers subfloor imperfections.\*

\*Each project is unique, check our installation notice for more details.





#### Click it quick and easy



On the Ultimate collection, Tarkett is introducing for the first time the i4F triple lock click system, the easiest and fastest on the market.

% faster than a traditional angle-angle click system


**IUU**m<sup>2</sup> of flooring in **b** hours by 1 person



#### Install and walk

Everything about Starfloor Ultimate makes it fast to install and ready for immediate use.

No glue, no drying time

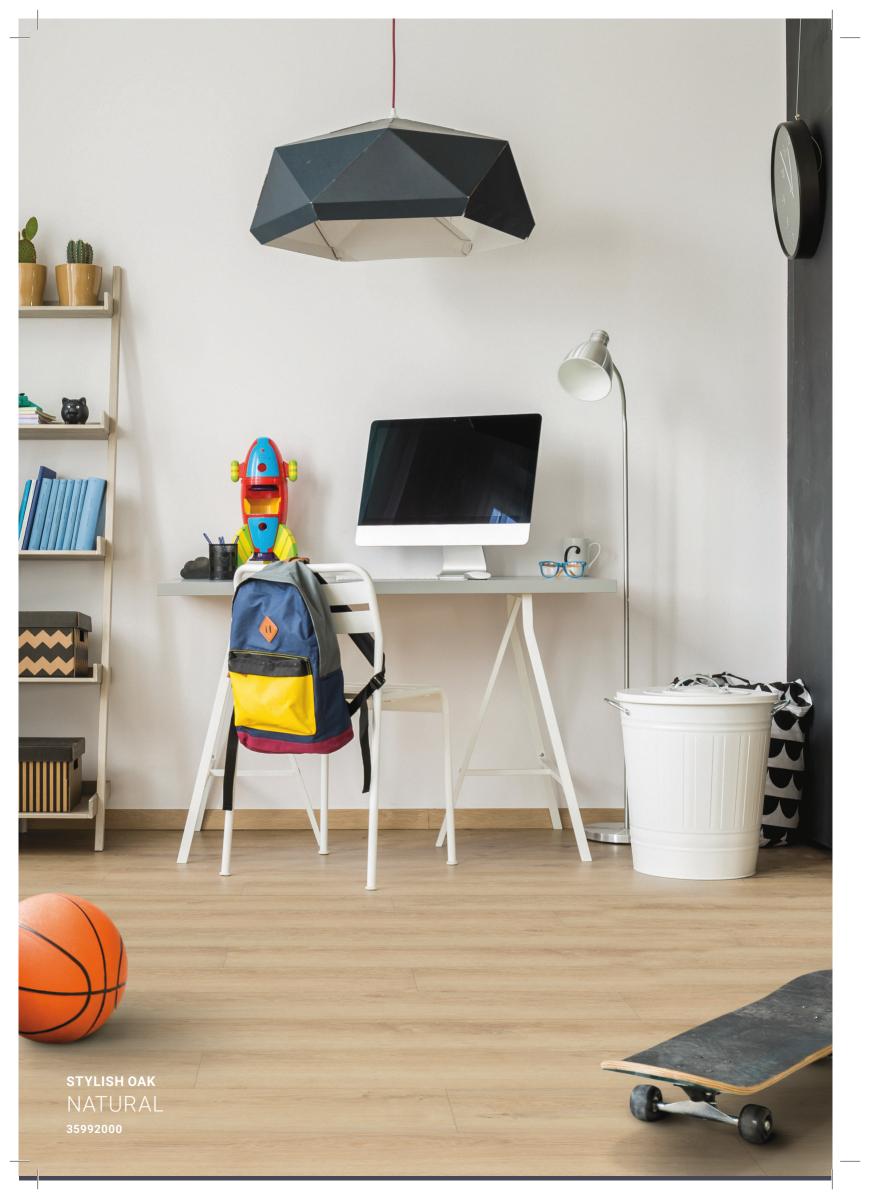




## **ULTIMATE ACOUSTICS**

The soundblock technology is integrated into Starfloor Click Ultimate's acoustic backing. Daily thumping and dragging are absorbed into the floor for everyone's peace of mind.




#### **Decrease** in-room sound

The exclusive Ultimate structure reduces in-room walking noise by the greatest amount of any hard floor solution.






Reduce sound transmission between floors by 19dB.



#### In-room walking noise (dB)








#### Save money

With Starfloor Click Ultimate integrated accoustic backing, no need for additional accoustic underlay.

••••••

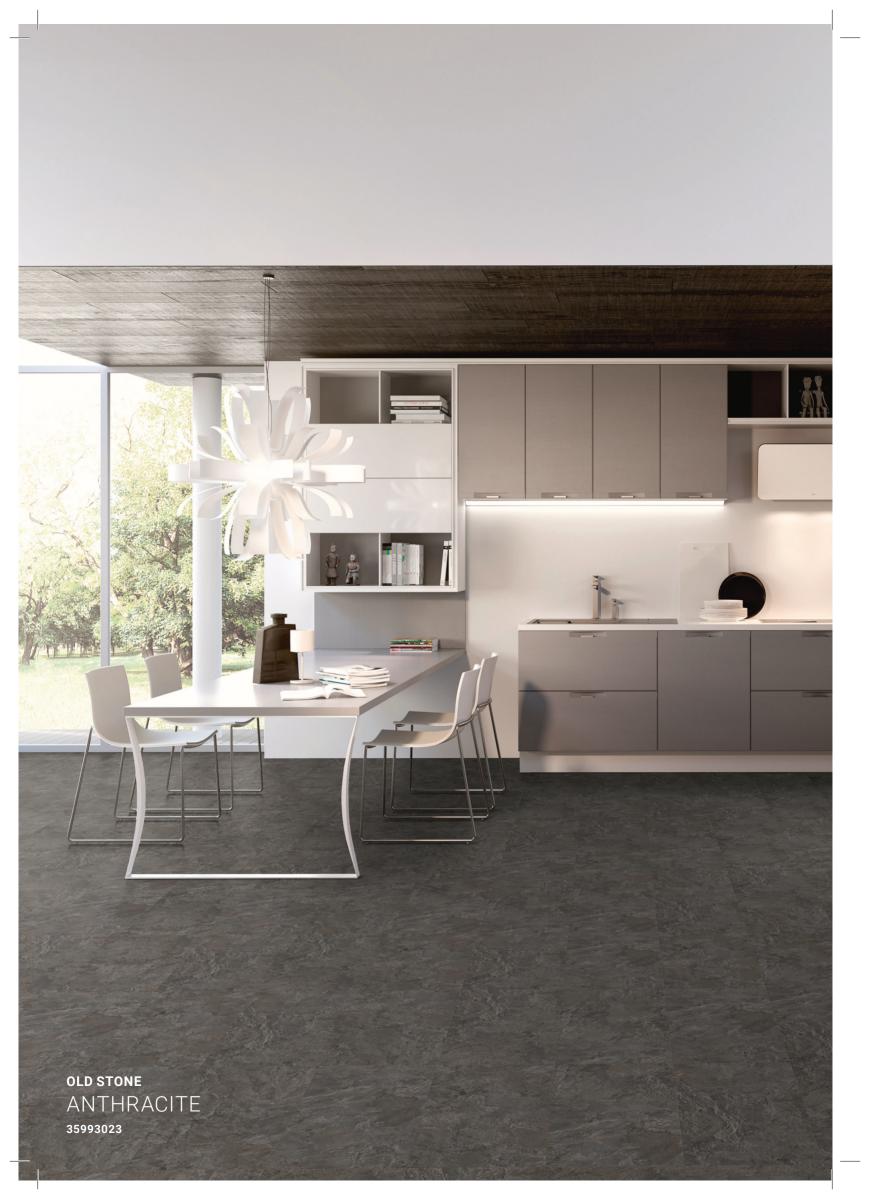

## **ULTIMATE DESIGN**

Starfloor Click Ultimate offers a select range of elegant wood and stone designs that will immediately add warmth and style to any room. Choose the essence and colour that reflect your interior. From timeless to contemporary, Starfloor Click Ultimate immediately feels right at home in your home.



### Replicate

A high definition printed decorative layer recreates the look and feel of wood and stone so well that it could be mistaken for the actual material.

15 modern and stylish wood and stone designs





#### Reproduce the Tactile

Thanks to the rigid composite core, Starfloor Ultimate resembles an actual hard floor covering in feel as much as in presentation.

•••••

Wood or stone feeling



#### **Attention to Detail**


Most Starfloor Click Ultimate designs benefit from our Plus Effect technology. Each planks has an embossing in register (EIR) treatment to add lifelike traces and patterns that subtly catch the light.

% matte finish for additional realism



Plus Effect: Engrave patterns onto planks with EIR to reproduce wood's natural essence



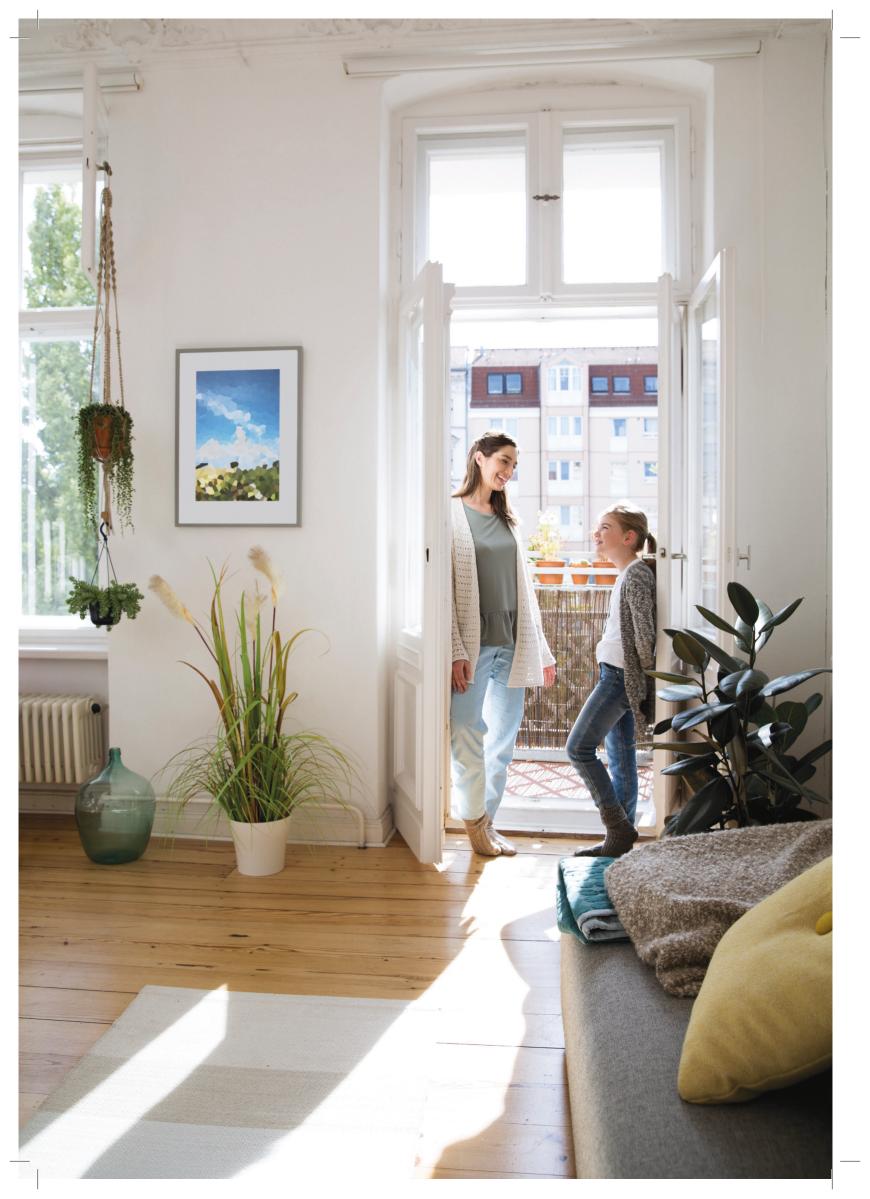

### **CARING FOR PEOPLE**

### AND THE PLANET

At Tarkett, we strive to support both our professional clients and consumers in creating healthy, beautiful and sustainable living spaces. Working with industry partners, we're bringing our best thinking and efforts toward making a positive impact on people and the planet.



#### **Designing for life**

We design our flooring solutions for life, thereby contributing to people's well-being and good health as well as preserving natural resources.



#### Good indoor air quality

Through low levels of total volatile organic compounds (TVOCs) – TVOCs  $\leq$  100  $\mu g/m^3$ , compliant to EU standard EN-ISO 16000

## Healthy spaces thanks to 100% phthalate-free product

We have been proactive in seeking alternatives to phthalates as they have been the subject of scientific debate about their potential impact on human health. Since 2010, we have developed the use of a phthalate-free plasticizer technology for our vinyl floors which is approved for food containers and toys for young children.



#### **Quiet environment**

19dB sound absorption thanks to Soundblock technology.

•••••



#### Closing the loop

We work towards closing the loop, as we actively participate in the development of a circular economy, in which resources are responsibly stewarded, recycled and re-used.



#### **Driving collaboration**

We aim at driving collaboration with our customers, suppliers and industry partners as we believe in a collaborative approach to respond to global challenges.

We are committed to Doing Good, Together.

## **ENHANCE YOUR SPACES WITH** STARFLOOR ULTIMATE COLLECTION



#### 1. Stylish Oak

A classic and elegant oak with a natural colour play which will show some linear structures when installed. This Oak is a perfect companion to go with bold and rich colours.





Stylish Oak Beige Matching skirting: 26643002







Stylish Oak Grey 35992001 Matching skirting: 26643001



Stylish Oak Natural 35992000 Matching skirting: 26643000



2. Bleached Oak

Trendy ceruse oak. A light and minimalist floor.



Bleached Oak Grege 35992004 Matching skirting: 26643004



Bleached Oak Brown 35992006 Matching skirting: 26643006



Bleached Oak Natural 35992005 Matching skirting: 26643005



#### 3. Bohemian Pine

Vintage and original painted pine.





**Bohemian Pine White** 35991010 Matching skirting: 26643010



Matching skirting: 26643011



#### 4. Weathered Oak

Rustic and traditional oak with cracks and saw effects. An alive floor.





Weathered Oak Brown 35992008 Matching skirting: 26643008



Weathered Oak Anthracite 35992009 Matching skirting: 26643009



Weathered Oak Natural 35992007 Matching skirting: 26643007

#### 5. Timeless Concrete

Selected warm colours which will mix perfectly with wood and warm fabrics. A new cosy concrete in classic tile dimensions.








Timeless Concrete Anthracite 35993021 Matching skirting: 26643021

#### 6. Old Stone Natural and traditional stone.





Old Stone Anthracite 35993023 Matching skirting: 26643023

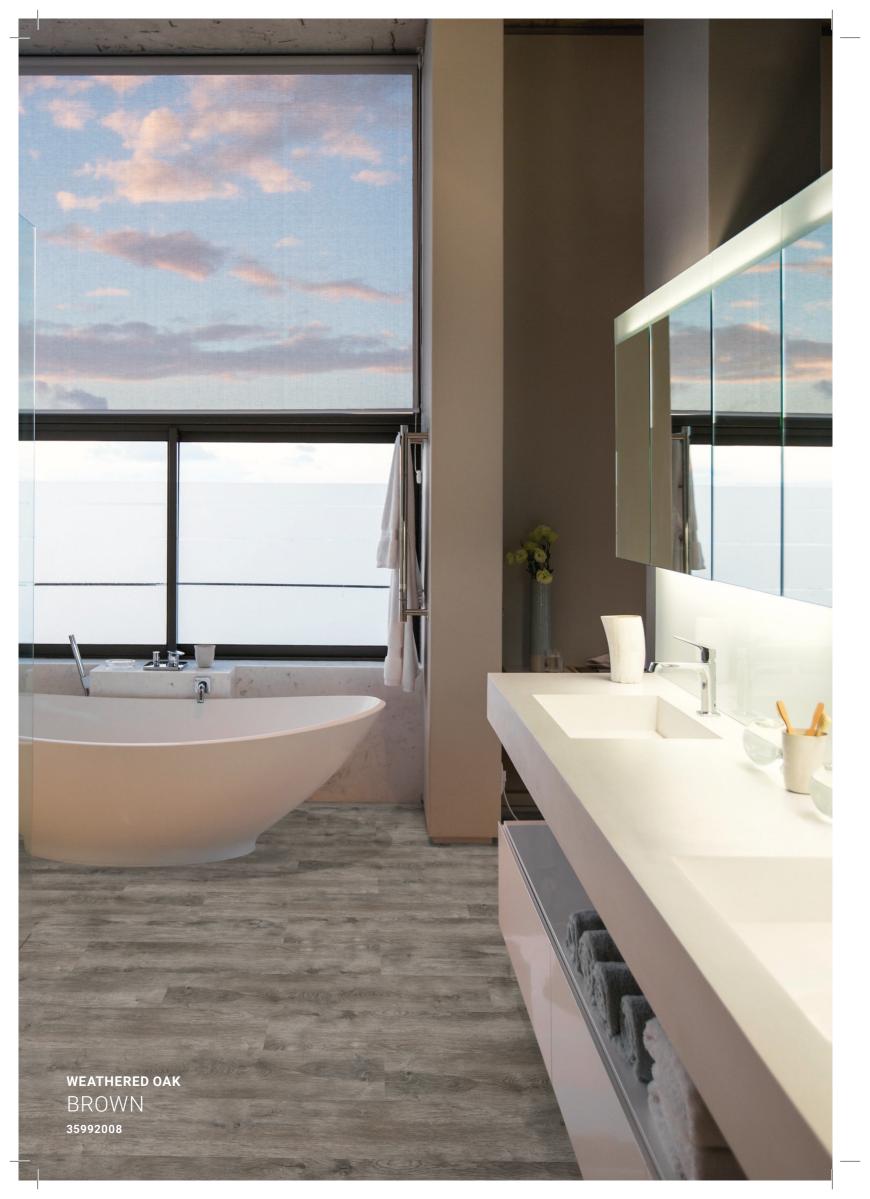


## **ACCESSORIES**FOR A PERFECT FINISH

Starfloor Click Ultimate comes with a full range of coordinated skirting and additional accessories. Please check with your local Tarkett representative for more information.

#### **SKIRTING**

#### **PVC Decorative Skirting**



8 cm high skirtings with PUR surface treatment.

□ White


With Decorative film matching collection designs

Packaging: 2,02 lm skirtings

in packs of 10

#### **ACCESSIBILITY**

#### 3D Stud



Ready to use selfadhesive warning studs kits for heavy traffic. Easy, effective and reliable installation.


■ Grey (1440 551)

■ Black (1440 552)

Packaging: Kit of 33 studs already pre-mounted in 300 x 300 mm template, allowing the installation of 33 studs at the same time

#### **PROFILE**

#### **Transition profile**



Aluminium profile, to be screwed.

Silver (1451 011)

Stainless Steel (1451 012)

Packaging: 2.7 lm profiles in packs of 10 .....

## TECHNICAL SPECIFICATIONS

#### **Starfloor Click Ultimate**

The selected flooring similar to Starfloor Click Ultimate belongs to the compact vinyl floors category with a Rigid Composite Core layer manufactured through extrusion process.

It also contains an integrated acoustic backing of 19db.

It is available in planks (176  $\times$  1213 mm) and tiles (300  $\times$  600 mm) formats.

The wear layer of 0.55mm is reinforced with a PU treatment, which permanently suppresses any wax and regenerating polish spray maintenance operations. It has a static indentation resistance  $\leq$  0,05mm and a dimensional stability according to ISO Norm EN 23 999 of 0,05% (versus  $\leq$  0,15% required by the norm.

Its emission rate of volatile organic compounds in air is less than 100 μg/m³ (COVT after 28 days).

Starfloor Click Ultimate comes with a 20 Years Warranty for Residential use.



## **TECHNICAL**DATA SHEET

Type of floor covering EN ISO 10582 Heterogeneous Compact Resilient Floorcovering Domestic: 23 Commercia: 33 Industria: 42  Technical characteristics  Total thickness EN ISO 24346 6,5 mm Wear layer thickness EN ISO 24340 0,55 mm  Total weight EN ISO 10582 Type I  Dimensions EN ISO 24342 Tiles 300 x 600 mm 7 tiles/box = 1,28 m²  Tiles 300 x 600 mm 7 tiles/box = 1,26 m²  Surface treatment (PUR) Yes - PUR Ultimate  Beveled edges Yes - 4 Bevels  Technical performances  Technical performances  Dimensional stability EN ISO 23999 ≤ 1 mm Reaction to fire EN 13501-1 B <sub>R</sub> ≤1 mm Residual indentation EN ISO 2434-1 ≤ 0,05 mm  Furniture leg EN 424 No damage  Reduction of in-room impact noise EN ISO 31-074 Class C (L <sub>m,m</sub> < 85 dB)  Thermal resistance EN ISO 105-BO2 (method 3a) ≥ 6  Chemical resistance EN ISO 24345 ≥ 50N / 50mm  Electrical properties EN 1815 ≥ 2 kV  Peeling resistance EN ISO 24345 ≥ 50N / 50mm  Electrical properties EN 1815 ≥ 2 kV  Peeling resistance EN ISO 24345 ≥ 50N / 50mm  Electrical properties EN 1815 ≥ 2 kV  Peeling resistance EN ISO 24345 ≥ 50N / 50mm  Electrical properties EN 1815 ≥ 2 kV  Peeling resistance EN ISO 24345 ≥ 50N / 50mm  Underfloor heating Suitable - max. 27 *C	Certification & classification	Standards	Starfloor Click Ultimate			
Classification         EN ISO 10874         Commercial: 3s Industrial: 42 s Industria: 42 s Industrial: 42 s Industrial: 42 s Industrial: 42 s Industrial: 42 s Indust	Type of floor covering	EN ISO 10582	Heterogeneous Compact Resilient Floorcovering			
Total thickness         EN ISO 24346         6,5 mm           Wear layer thickness         EN ISO 24340         0,55 mm           Total weight         EN ISO 23997         11,3 kg/m²           Wear layer binder content         EN ISO 10582         Type I           Dimensions         EN ISO 24342         Planks         176 x 1213 mm         6 planks/box = 1,28 m²           Surface treatment (PUR)         Yes - PUR Ultimate         Yes - PUR Ultimate           Beveled edges         Yes - 4 Bevels         Yes - 4 Bevels           Technical performances           Technical perf	Classification	EN ISO 10874	Commercial: 33			
Wear layer thickness         EN ISO 24340         0,55 mm           Total weight         EN ISO 23997         11,3 kg/m²           Wear layer binder content         EN ISO 10582         Type I           Dimensions         EN ISO 24342         Planks         176 x 1213 mm         6 planks/box = 1,28 m²           Surface treatment (PUR)         Yes - PUR Ultimate           Beveled edges         Yes - 4 Bevels           Technical performances           Technical performances           Average measured value 0,05% Required value 0,05% Required value 0.15%           Curl resultant to heat         EN ISO 23999         Average measured value 0,05% Required value 0.15%           Curl resultant to heat         EN ISO 23999         Average measured value 0,05% Required value 0,05% Required value 0,05%           Technical performances           Everage measured value 0,05% Required value 0,05% Required value 0,05%           Technical performances           Technical performances           Everage measured value 0,05%           Required value 0,05%           Technical performances           Everage measured value 0,05%           Technical performances           Everage me	Technical characteristics					
Total weight         EN ISO 23997         11,3 kg/m²           Wear layer binder content         EN ISO 10582         Type I           Dimensions         EN ISO 24342         Planks         176 x 1213 mm         6 planks/box = 1,28 m²           Surface treatment (PUR)         Yes - PUR Ultimate         Yes - PUR Ultimate           Beveled edges         Yes - 4 Bevels         Yes - 4 Bevels           Technical performances           Dimensional stability         EN ISO 23999         ≤ 1 mm         Yes - 4 Bevels           Technical performances           Curl resultant to heat         EN ISO 23999         ≤ 1 mm         Yes - 4 Bevels           Technical performances           Curl resultant to heat         EN ISO 23999         ≤ 1 mm         Yes - 4 Bevels           Technical performances           En ISO 23999         ≤ 1 mm         Yes - 4 Bevels         Yes - 4 Bevels           Technical performances           En ISO 23999         ≤ 1 mm         Yes - 4 Bevels	Total thickness	EN ISO 24346	6,5 mm			
Wear layer binder content         EN ISO 10582         Type I           Dimensions         EN ISO 24342         Planks         176 x 1213 mm         6 planks/box = 1,28 m²           Surface treatment (PUR)         Yes - PUR Ultimate         7 tiles/box = 1,26 m²           Surface treatment (PUR)         Yes - PUR Ultimate           Beveled edges         Yes - 4 Bevels           Technical performances           Technical performances           Dimensional stability         EN ISO 23999         Average measured value 0,05% Required value ≤ 0.15%           Curl resultant to heat         EN ISO 23999         ≤ 1 mm           Reaction to fire         EN 13501-1         Bir s1           Residual indentation         EN ISO 24343-1         ≤ 0,05 mm           Furniture leg         EN 424         No damage           Castor chair         ISO 4918 - EN 425         No damage           Impact sound reduction         EN ISO 31-074         Class C (Lnew < 85 dB)	Wear layer thickness	EN ISO 24340	0,55 mm			
Planks   Planks	Total weight	EN ISO 23997	11,3 kg/m²			
Planks   176 x 1213 mm   6 planks/box = 1,28 m²     Tiles   300 x 600 mm   7 tiles/box = 1,26 m²     Surface treatment (PUR)   Yes - PUR Ultimate	Wear layer binder content	EN ISO 10582	Type I			
Surface treatment (PUR)         Yes - PUR Ultimate           Beveled edges         Yes - 4 Bevels           Technical performances           Dimensional stability         EN ISO 23999         Average measured value 0,05% Required value ≤ 0.15%           Curl resultant to heat         EN ISO 23999         ≤ 1 mm           Reaction to fire         EN 13501-1         Bir-s1           Residual indentation         EN ISO 24343-1         ≤ 0,05 mm           Furniture leg         EN 424         No damage           Castor chair         ISO 4918 - EN 425         No damage           Impact sound reduction         EN ISO 717-2         ΔLw 19 dB           Reduction of in-room impact noise         EN ISO 10456         0,05 m² K/W           Light fastness         EN ISO 10456         0,05 m² K/W           Light fastness         EN ISO 26987         Very Good           Slip resistance         BN 180 26987         Very Good           Slip resistance         EN 1815         ≤ 2 kV           Peling resistance         EN 180 24345         ≥ 50N / 50mm	Dimensions	EN ISO 24342	Planks	176 x 1213 mm	6 planks/box = 1,28 m <sup>2</sup>	
Yes - 4 Bevels           Technical performances           Dimensional stability         EN ISO 23999         Average measured value 0,05% Required value ≤ 0.15%           Curl resultant to heat         EN ISO 23999         ≤ 1 mm           Reaction to fire         EN 13501-1         B <sub>IF</sub> s1           Residual indentation         EN ISO 24343-1         ≤ 0,05 mm           Furniture leg         EN 424         No damage           Castor chair         ISO 4918 - EN 425         No damage           Impact sound reduction         EN ISO 717-2         ΔLw 19 dB           Reduction of in-room impact noise         EN ISO 31-074         Class C (Lnew < 85 dB)			Tiles	300 x 600 mm	7 tiles/box = 1,26 m <sup>2</sup>	
Technical performancesDimensional stabilityEN ISO 23999Average measured value 0,05% Required value ≤ 0.15%Curl resultant to heatEN ISO 23999≤ 1 mmReaction to fireEN 13501-1 $B_{IF}$ s1Residual indentationEN ISO 24343-1≤ 0,05 mmFurniture legEN 424No damageCastor chairISO 4918 - EN 425No damageImpact sound reductionEN ISO 717-2 $\Delta$ Lw 19 dBReduction of in-room impact noiseEN ISO 31-074Class C ( $L_{new}$ < 85 dB)	Surface treatment (PUR)		Yes - PUR Ultimate			
Dimensional stabilityEN ISO 23999Average measured value 0,05% Required value ≤ 0.15%Curl resultant to heatEN ISO 23999≤ 1 mmReaction to fireEN 13501-1 $B_{ll}$ =\$1Residual indentationEN ISO 24343-1≤ 0,05 mmFurniture legEN 424No damageCastor chairISO 4918 - EN 425No damageImpact sound reductionEN ISO 717-2 $\Delta$ Lw 19 dBReduction of in-room impact noiseEN ISO 31-074Class C (Ln,ew < 85 dB)	Beveled edges		Yes - 4 Bevels			
Dimensional stability         EN ISO 23999         Required value ≤ 0.15%           Curl resultant to heat         EN ISO 23999         ≤ 1 mm           Reaction to fire         EN 13501-1 $B_{II}$ -S1           Residual indentation         EN ISO 24343-1         ≤ 0,05 mm           Furniture leg         EN 424         No damage           Castor chair         ISO 4918 - EN 425         No damage           Impact sound reduction         EN ISO 717-2 $\Delta$ Lw 19 dB           Reduction of in-room impact noise         EN ISO 31-074         Class C ( $L_{ne,w}$ < 85 dB)	Technical performances					
Reaction to fire       EN 13501-1 $B_{ff}$ -\$1         Residual indentation       EN ISO 24343-1       ≤ 0,05 mm         Furniture leg       EN 424       No damage         Castor chair       ISO 4918 - EN 425       No damage         Impact sound reduction       EN ISO 717-2 $\Delta$ Lw 19 dB         Reduction of in-room impact noise       EN ISO 31-074       Class C (Ln,e,w < 85 dB)	Dimensional stability	EN ISO 23999				
Residual indentationEN ISO 24343-1≤ 0,05 mmFurniture legEN 424No damageCastor chairISO 4918 - EN 425No damageImpact sound reductionEN ISO 717-2 $\Delta$ Lw 19 dBReduction of in-room impact noiseEN ISO 31-074Class C ( $L_{n,e,w}$ < 85 dB)	Curl resultant to heat	EN ISO 23999	≤ 1 mm			
Furniture leg         EN 424         No damage           Castor chair         ISO 4918 - EN 425         No damage           Impact sound reduction         EN ISO 717-2         ΔLw 19 dB           Reduction of in-room impact noise         EN ISO 31-074         Class C (Ln,e,w < 85 dB)	Reaction to fire	EN 13501-1	B <sub>ff</sub> -s1			
Castor chair         ISO 4918 - EN 425         No damage           Impact sound reduction         EN ISO 717-2         ΔLw 19 dB           Reduction of in-room impact noise         EN ISO 31-074         Class C (Ln,ew < 85 dB)	Residual indentation	EN ISO 24343-1	≤ 0,05 mm			
Impact sound reductionEN ISO 717-2 $\Delta$ Lw 19 dBReduction of in-room impact noiseEN ISO 31-074Class C (Ln,ew < 85 dB)	Furniture leg	EN 424	No damage			
Reduction of in-room impact noiseEN ISO 31-074Class C ( $L_{n,e,w}$ < 85 dB)Thermal resistanceEN ISO 10456 $0,05 \text{ m}^2 \text{ K/W}$ Light fastnessEN ISO 105-B02 (method 3a) $\geq 6$ Chemical resistanceEN ISO 26987Very GoodSlip resistanceDIN 51130 R93R9 $\mu \geq 0,30$ Electrical propertiesEN 1815 $\leq 2 \text{ kV}$ Peeling resistanceEN ISO 24345 $\geq 50N / 50 \text{mm}$	Castor chair	ISO 4918 - EN 425	No damage			
Thermal resistance EN ISO 10456 0,05 m² K/W  Light fastness EN ISO 105-B02 (method 3a) ≥ 6  Chemical resistance EN ISO 26987 Very Good  Slip resistance DIN 51130 R9 $\mu \ge 0,30$ Electrical properties EN 1815 ≤ 2 kV  Peeling resistance EN ISO 24345 ≥ 50N / 50mm	Impact sound reduction	EN ISO 717-2	ΔLw 19 dB			
Light fastnessEN ISO 105-B02 (method 3a)≥ 6Chemical resistanceEN ISO 26987Very GoodSlip resistanceDIN 51130 EN 13893R9 $\mu$ ≥ 0,30Electrical propertiesEN 1815≤ 2 kVPeeling resistanceEN ISO 24345≥ 50N / 50mm	Reduction of in-room impact noise	EN ISO 31-074	Class C ( $L_{n,e,w}$ < 85 dB)			
Chemical resistance EN ISO 26987 Very Good  Slip resistance $DIN 51130$ R9 $EN 13893$ $EN 13893$ $EN 13893$ $EN 13893$ $EN 13893$ $EN 1815$ ≤ 2 kV  Peeling resistance $EN ISO 24345$ ≥ 50N / 50mm	Thermal resistance	EN ISO 10456	0,05 m² K/W			
Slip resistance	Light fastness	EN ISO 105-B02 (method 3a)	≥ 6			
Silp resistance EN 13893 $\mu \ge 0,30$ Electrical properties EN 1815 $\le 2 \text{ kV}$ Peeling resistance EN ISO 24345 $\ge 50 \text{N} / 50 \text{mm}$	Chemical resistance	EN ISO 26987	Very Good			
Peeling resistance EN ISO 24345 ≥ 50N / 50mm	Slip resistance					
	Electrical properties	EN 1815	≤ 2 kV			
Underfloor heating Suitable - max. 27 °C	Peeling resistance	EN ISO 24345	≥ 50N / 50mm			
	Underfloor heating		Suitable - max. 2	27 °C		

The above information is subject to modification for the benefit of further improvement. (01/18).

Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.

CUSTOMS TARIFF: 4820 5000 00



















ccording to Classification ISO 10874 - 0,55 mm

Produced under license from I4F https://i4f-patents.com

Disclaimer: Please note that products in photos are installed for creative purposes and not according to technical specifications. Please refer to Tarkett installation instructions for guidance.

